

**NuSil Technology**

1050 Cindy Lane • Carpinteria, CA 93013

805/684-8780 • 805/566-9905 Fax

[www.nusil.com](http://www.nusil.com)

An ISO 9001 Certified Company

# CV-2646

Controlled Volatility Electrically Conductive RTV Silicone

## Product Profile

### Description


- Two-part, tan-colored electrically conductive RTV silicone
- Based on a diphenyl dimethyl silicone copolymer with a broad temperature range
- 100:0.5 Mix Ratio (Base: Catalyst)

### Applications

- For applications requiring low outgassing and minimal volatile condensables under extreme operating conditions to avoid condensation in sensitive devices
- Use for RFI and EMI shielding in electrical and space applications
- Use to adhere covers onto housings or for any application where grooves and other configurations require a non-flowable to limited flow material

Typical Properties	Result	Metric Conv.	ASTM	NT-TM
<b>Uncured:</b>				
Color	Tan	-	-	-
Consistency	Paste	-	-	-
Work Time	2 hours	-	-	008
<b>Cured: 7 days @ 25°C (77°F)</b>				
Appearance	Tan, elastomer	-	D2090	002
Specific Gravity @ 25°C (77°F)	3.40	-	D792	003
Durometer, Type A	70	-	D2240	006
Tensile Strength	350 psi	2.4 MPa	D412, D882	007
Elongation	150%	-	D412, D882	007
Tear Strength	40 ppi	7.1 N/mm	D624	009
Lap Shear Strength (primed w/ SP-120)	250 psi	1.7 MPa	D1002	010
Young's Modulus	950 psi	6.6 MPa	-	-
Volume Resistivity	0.004 ohm-cm	-	D257	040
Thermal Conductivity	2.4 x 10 <sup>-3</sup> cal/(cm-sec-°C)	1.0 W/m-k	C177, C1045	101
Coefficient of Linear Thermal Expansion				
Below Tg (-150° to -115°C)	45 ppm/°C	45 µm/m/°C	D3386	-
Above Tg (-95°C to 250°C)	185 ppm/°C	185 µm/m/°C	D3386	-
Collected Volatile Condensable Material (CVCM)	0.06%	-	E595	072
Total Mass Loss (TML)	0.30%	-	E595	072
Operating Temperature Range	-178°F to 500°F	-115°C to 260°C	-	-

## Dynamic Mechanical Analysis (DMA) ASTM D4065

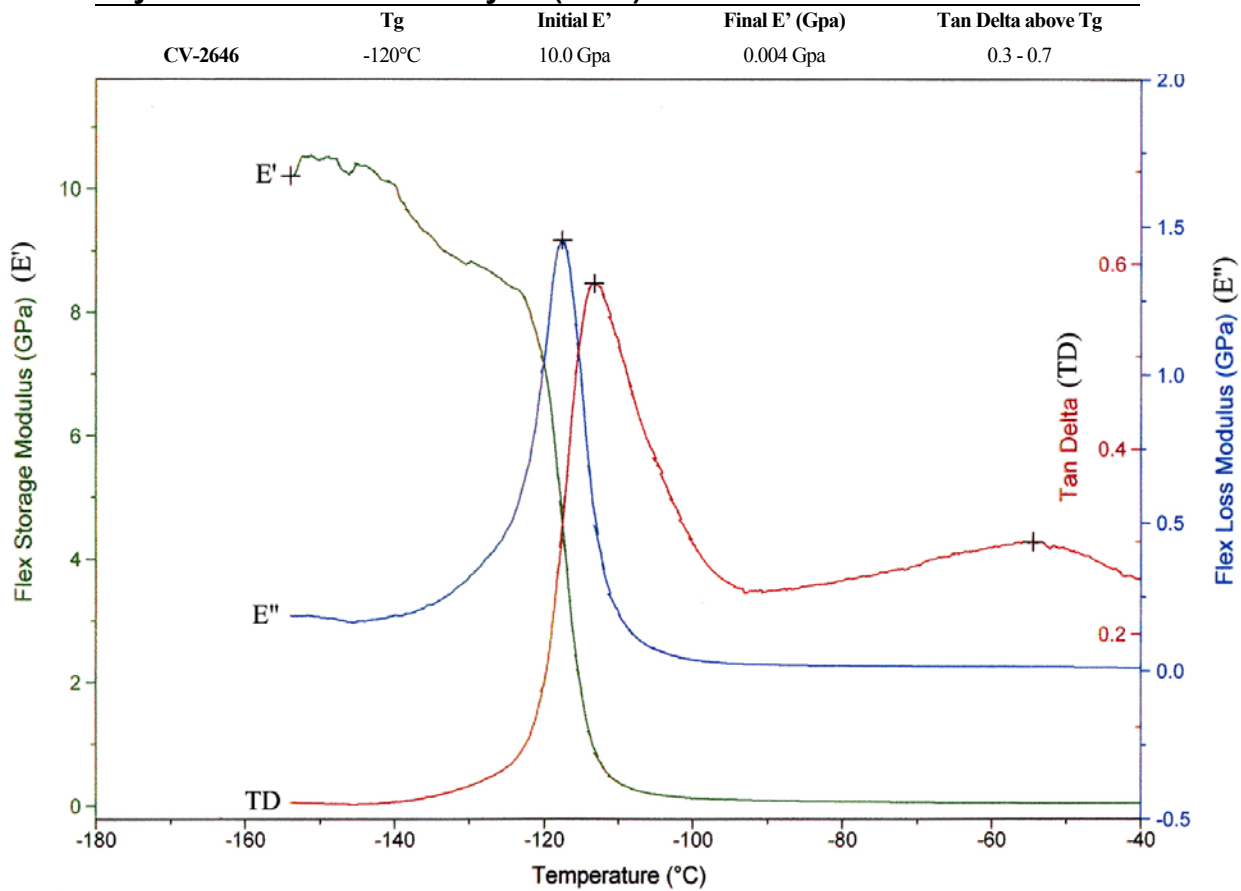

### Instructions for Use

#### Mixing

Thoroughly stir base prior to weighing for curing agent addition as the product separates. Mix 100 parts base to 0.5 parts catalyst by weight, just prior to use.

**Caution:** Curing agent may cause skin irritation. In case of eye contact, irrigate with water immediately and seek medical attention. (Standard catalyst is dibutyl tin dilaurate.)

#### Vacuum Deaeration

Remove air entrapped during mixing by common vacuum deaeration procedure, observing all safety precautions. Slowly apply full vacuum to a container rated for use and at least four times the volume of material being deaerated. Hold vacuum until bulk deaeration is complete.

**Note:** Some bonding applications may require the use of a primer. NuSil Technology SP-120 silicone primer is recommended.

#### Packaging

50 Gram Kit  
100 Gram Kit  
250 Gram Kit  
500 Gram Kit

#### Warranty

6 Months

### Warnings About Product Safety

NuSil Technology believes that the information and data contained herein are accurate and reliable. However, the user is responsible to determine the material's suitability and safety of use. NuSil Technology cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology makes no warranty concerning fitness for any use or purpose. NuSil Technology has completed no testing to establish safety of use in any medical application.

NuSil Technology has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology

products in a particular application, review the latest Material Safety Data Sheets and contact NuSil Technology with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, obtain available product safety information and take the necessary steps to ensure safety of use.

## **Specifications**

Do not use the typical properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

## **Patent Warning**

NuSil Technology disclaims any expressed or implied warranty against the infringement of any patent. NuSil Technology does not warrant the use or sale of the products described herein will not infringe the claims of any United States' or other country's patents covering the product itself, its use in combination with other products or its use in the operation of any process.

## **Warranty Information**

NuSil Technology's warranty period is 6 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology provides a specific written warranty of fitness for a particular use, NuSil Technology's sole warranty is that the product will meet NuSil Technology's then current specification. NuSil Technology specifically disclaims any other expressed or implied warranty, including warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology expressly disclaims any liability for incidental or consequential damages.