


Polymer Systems Technology Limited

UK & Ireland Distributor



© 2011 - Polymer Systems Technology Limited TM
Unit 2. Network 4. Cressex Business Park,
Lincoln Road, High Wycombe, Bucks. HP12 3RF
Phone +44 (0) 1494 446610
Fax: +44 (0) 1494 528611
Web: <http://www.siliconepolymers.co.uk>
Email: sales@silicone-polymers.co.uk

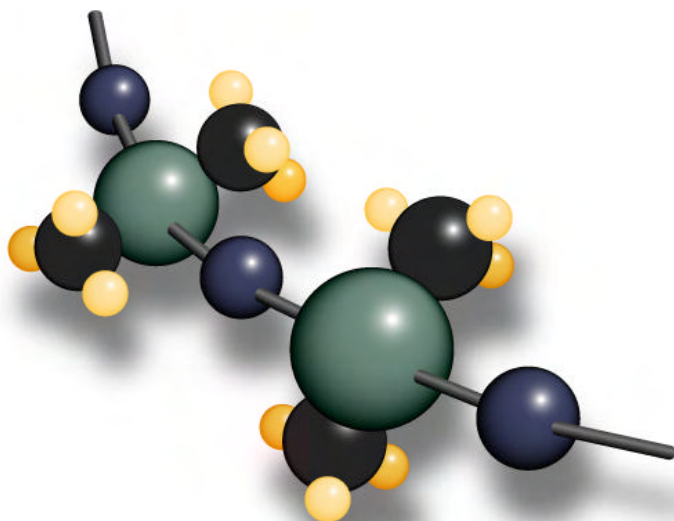

CF2-1130

Non-Corrosive RTV Silicone Adhesive/Sealant

Product Profile

Description

- One-part, translucent RTV silicone dispersion
- Based on a methyl silicone polymer
- Non-corrosive cure
- Lower viscosity
- Extended work time

Applications

- For bonding glass, aluminum, silicone or a variety of other substrates
- For applications requiring a non-corrosive silicone adhesive
- For filling minute crevices and voids in potting and sealing applications
- For coating relatively large areas before joining the parts together (due to an extended work time)
- For applications requiring an operating temperature range of -65°C to 240°C (-85°F to 465°F)

Typical Properties	Result	Metric Conv.	ASTM	NT-TM
Uncured:				
Appearance	Translucent	-	D2090	002
Non-Volatile Content	55%	-	D-2288-69	004
Tack-Free Time	1.5 hours	-	C-679-87	005
Set Up Time (Thin Section)	24 hours	-	-	-
Cured: 7 days @ ambient temp. and humidity				
Specific Gravity	1.09	-	D792	003
Durometer, Type A	50	-	D2240	006
Tensile Strength	975 psi	6.7 Mpa	D412	007
Elongation	400%	-	D412	007
Tear Strength	70 ppi	12.3 kN/m	D624	009

Instructions for Use

Substrate Consideration

Although considered to be non-corrosive to most substrates, the oxime cure system may cause discoloration in the presence of copper or copper alloys.

Note: Some bonding applications may require the use of a primer. NuSil Technology SP-120 silicone primer is recommended.

Warnings About Product Safety

NuSil Technology believes the information and the data contained herein are accurate and reliable. However, the user is responsible to determine the material's suitability and safety of use. NuSil Technology cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology makes no warranty concerning fitness for any use or purpose. NuSil Technology has completed no testing to establish safety of use in any medical application.

Packaging

- 1 Pint (400 g)
- 1 Gallon (3.2 Kg)
- 5 Gallon Kit (16 Kg)

Warranty

6 Months

NuSil Technology has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology products in a particular application, review the latest Material Safety Data Sheet and contact NuSil Technology with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, obtain available product safety information and take the necessary steps to ensure safety of use.

Specifications

Do not use the typical properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Patent Warning

NuSil Technology disclaims any expressed or implied warranty against the infringement of any patent. NuSil Technology does not warrant the use or sale of the products described herein will not infringe the claims of any United States' or other country's patents covering the product itself, its use in combination with other products or its use in the operation of any process.

Warranty Information

NuSil Technology's warranty period is 6 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology provides a specific written warranty of fitness for a particular use, NuSil Technology's sole warranty is that the product will meet NuSil Technology's then current specification. NuSil Technology specifically disclaims any other expressed or implied warranty, including warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology expressly disclaims any liability for incidental or consequential damages.